


1. Select DMR “Homebrew/MMDVM” in the Connector Selector dropdown menu.

2. Click “Switch to Selected”

**Update:** check the Advanced Mode in the bottom right corner

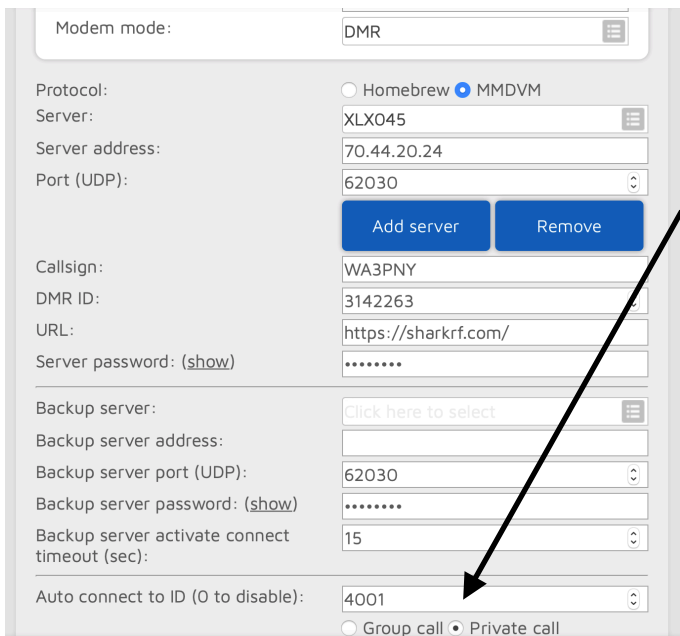

3. Select MMDVM as the Protocol

4. Drop down the Server Selection Box

5. Select XLX045

6. Set your Call and DMR ID

7. If you are connecting to the PA Cross Mode select 4001 for the “Auto Connect to ID” and select Private Call (only visible in Advanced Mode)

Module A 4001 (PA Cross Mode)

Module B 4002

Module C 4003

Module D 4004

...

Module Z 4026

## DMR/Homebrew/MMDVM

Save

Modem receive frequency (MHz): 433.900000  
Modem transmit frequency (MHz): 433.900000  
Modem mode: DMR

Protocol:  Homebrew  MMDVM  
Server: XLX045  
Server address: 70.44.20.24  
Port (UDP): 62030  
   
Callsign: WA3PNY  
DMR ID: 3142263  
URL: https://sharkrf.com/  
Server password: (show) .....

click Save to connect